

Article number: 03 037 00 99

WC module MONTUS Flow H Type CS 120

WC module, height 115 cm with concealed cistern 12 cm. For barrier-free WCs. For stud wall or pre-wall mounting or exposed installation. For wall-mounted WC with 180 or 230 mm fastening dimension. Suitable for networking with the SCHELL SWS water management system. Configurable via SCHELL Single Control SSC. Integrated flush valve with drain via flush pipe for scheduled stagnation flushes. Self-supporting, powder-coated steel profiled frame with height-adjustable feet and cross bars. Saves water with dual flush and delayed filling process (saves about 0.5 l/flush). Flush triggering electronic or mechanical.

Scope of delivery


- WC module
 - WC concealed cistern 12 cm, actuation from front
 - Angle valve with regulating function, G 1/2 AG, noise class I
 - Flush pipe \varnothing 45 mm, with construction plug
 - Height-adjustable special feet 0-15 cm, self-supporting
- WC connection set (supply \varnothing 45 mm, drain \varnothing 90/110 mm)
- PE reducer \varnothing 90 / 110 mm
- Conduit 5 m
- Fastening material for WC installation (fastening bolts M 12 x 200 mm, protection hoses, plastic collar bushings, nuts, flat washers, cover caps)
- Fastening material for installation feet
- MONTUS wall bracket set (150-210 mm)

Technical data

- Material: Angle valve Brass, conform to German drinking water regulations; Frame Steel
- Dual flush: Eco flush volume 3 l, Main flush volume 4/5/6/7 l adjustable (6 l factory setting)
- Load capacity: max. 400 kg (when using MONTUS wall bracket set)
- Surface: Frame Powder coat finish
- Dimensions: w 42 cm x h 115 cm
- Waste water connection: \varnothing 90 /110 mm
- Flush pipe connection: \varnothing 45 mm
- Water connection: DN 15 R 1/2 AG (rear)
- Waste water outlet: \varnothing 90/110 mm

Delivery data

- Weight: 17,44 kg/Piece
- Packing unit: 1

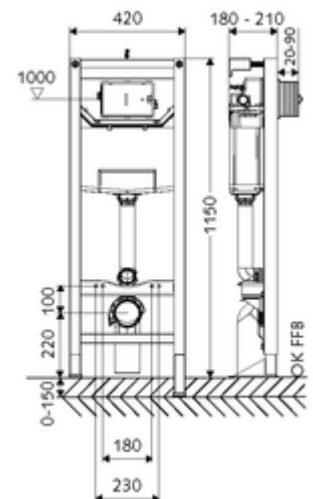

Necessary associated articles

| | |
|----------------------------------|-----------------------------|
| WC sound-insulation mat | Article no: 03 001 00 99 |
| <u>For mechanical actuation</u> | |
| WC operating panel MONTUS CIRCUM | Article no: 03 119 64 99 or |
| WC operating panel MONTUS CIRCUM | Article no: 03 119 06 99 or |
| WC operating panel MONTUS CIRCUM | Article no: 03 119 15 99 or |
| WC operating panel MONTUS BOARD | Article no: 03 120 06 99 or |

| | |
|----------------------------------|-----------------------------|
| WC operating panel MONTUS BOARD | Article no: 03 120 64 99 or |
| WC operating panel MONTUS BOARD | Article no: 03 120 15 99 or |
| WC operating panel MONTUS TOWER | Article no: 03 121 06 99 or |
| WC operating panel MONTUS TOWER | Article no: 03 121 64 99 or |
| WC operating panel MONTUS TOWER | Article no: 03 121 15 99 or |
| WC operating panel MONTUS KONKAV | Article no: 03 122 64 99 or |
| WC operating panel MONTUS KONKAV | Article no: 03 122 06 99 or |
| WC operating panel MONTUS KONKAV | Article no: 03 122 15 99 or |
| WC operating panel MONTUS PLACE | Article no: 03 070 28 99 or |
| WC operating panel MONTUS FIELD | Article no: 03 126 06 99 or |

For electronic actuation

| | |
|-----------------------------------|-----------------------------|
| Electronic conversion kit MONTUS | Article no: 03 127 00 99 |
| WC operating panel MONTUS FIELD E | Article no: 03 123 06 99 or |
| WC operating panel MONTUS FIELD H | Article no: 03 124 06 99 or |

For networking with SWS water management system

| | |
|-------------------------------------|---------------------------------|
| SWS Server | Article no: 00 500 00 99 |
| SWS Bus mains adapter | Article no: 00 505 00 99 |
| SWS Bus Extender wired BE-K Flow | Article no: 00 563 00 99 and/or |
| SWS Bus Extender wireless BE-F Flow | Article no: 00 564 00 99 and/or |

For operation with Single Control SSC

| | |
|----------------------------|--------------------------|
| SSC Bluetooth® module Flow | Article no: 00 929 00 99 |
|----------------------------|--------------------------|

For operation with Single Control SSC and electrical junction box

| | |
|---|--------------------------|
| Top-hat rail transformer 9 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 582 00 99 |
|---|--------------------------|

For operation with Single Control SSC and concealed junction box

For operation with SWS BE-F wireless bus extender or Single Control SSC

| | |
|--|--------------------------|
| Electrical junction box 9 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 583 00 99 |
|--|--------------------------|

Recommended associated articles

| | |
|------------------------------------|--------------------------|
| High-load module MONTUS | Article no: 03 063 00 99 |
| Concealed junction box MONTUS FLOW | Article no: 77 752 00 99 |
| SWS Temperature sensor PT 1000 | Article no: 00 562 00 99 |