

Article number: 01 909 28 99

Concealed shower LINUS Basic D-C-T Mixed water, ThermoProtect thermostat

For WBD-E-T concealed masterbox. Triggering via CVD-Touch electronics with automatic closing. Optional battery or mains operation. Suitable for networking with the SCHELL SWS water management system. Configurable via SCHELL Single Control SSC.



Scope of delivery


- Front panel
 - Operating button for thermostat with push sleeve, temperature setting unlockable/lockable at 38 °C
 - CVD-Touch electronics, programmable, IP65 protection against low-pressure water jets
- Fastening material

Technical data

- Setting options via SWS SSC
 - Actuation force (soft/medium/hard)
 - Manual programming (off/on)
 - Max. flow time (1-950 s)
 - Stagnation flush (off/1-1000 s, every 1-250 h after last flush/every 1-250 h)
 - Actuation timeout (off/1-255 s, timeout 1-2000 min)
- Setting options via manual programming
 - Max. flow time (4-120 s, 10 program stages)
 - Stagnation flush (off/20 s, every 24 h)
- Material: Actuation Brass; Front panel Stainless steel
- Surface: Actuation Chrome; Front panel Brushed stainless steel
- Dimensions front plate: w 183 mm x h 283 mm x d 3 mm
- Protection class: IP65 (CVD touch electronics)

Delivery data

- Weight: 1,84 kg/Piece
- Packing unit: 1

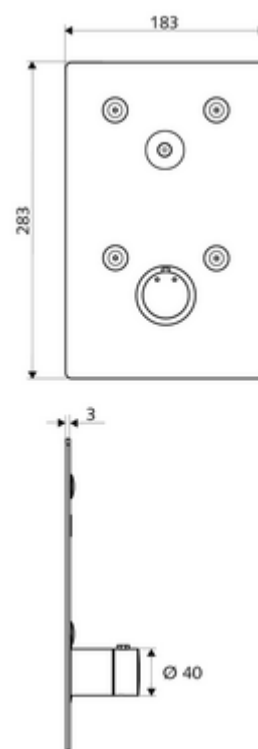

Necessary associated articles

| | |
|--|-----------------------------|
| Concealed Masterbox WBD-E-T | Article no: 01 802 00 99 |
| Universal 6 V battery compartment | Article no: 01 557 00 99 or |
| Concealed power supply unit 9 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 315 00 99 or |
| Top-hat rail transformer 9 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 582 00 99 or |
| Electrical junction box 9 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 583 00 99 or |

Recommended associated articles

| | |
|---------------------------------|-----------------------------|
| Universal connection cable 5 m | Article no: 01 570 00 99 or |
| Universal connection cable 10 m | Article no: 01 571 00 99 or |
| CVD-protection filter | Article no: 00 906 00 99 |
| Handle for thermostat EasyGrip | Article no: 29 192 06 99 |
| Shower head COMFORT Flex | Article no: 01 821 06 99 or |

| | |
|---|---------------------------------|
| Low aerosol shower head | Article no: 01 814 06 99 or |
| SWS Server | Article no: 00 500 00 99 |
| SWS Bus extender cable BE-K | Article no: 00 501 00 99 and/or |
| SWS Bus extender wireless BE-F | Article no: 00 502 00 99 and/or |
| SSC Bluetooth® module | Article no: 00 916 00 99 |
| Wall connection elbow PURIS | Article no: 06 469 06 99 or |
| Wall connection elbow | Article no: 06 463 06 99 or |
| <u>For thermal disinfection with SWS</u> | |
| Solenoid valve thermal disinfection SWS | Article no: 01 874 00 99 |
| <u>For manual thermal disinfection</u> | |
| Solenoid valve thermal disinfection | Article no: 01 875 00 99 |
| Thermal disinfection key switch | Article no: 01 538 00 99 |
| Concealed power supply unit 12 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 566 00 99 or |
| Mains adapter VDC, 100-240 VAC, 50-60 Hz | Article no: 01 490 00 99 or |
| Electrical junction box 12 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 537 00 99 or |
| <u>Where masterbox installation is too deep</u> | |
| Extension set D-E-T 25 mm | Article no: 01 860 06 99 or |
| Extension set D-E-T 50 mm | Article no: 01 865 06 99 or |