


Article number: 01 867 00 99

## Concealed Masterbox WBD-SC-M

### Mixed water

For LINUS/LINUS Basic D-SC-M concealed shower fittings. Manual actuation with automatic closing. With sealed housing bushings and internal isolating valve.

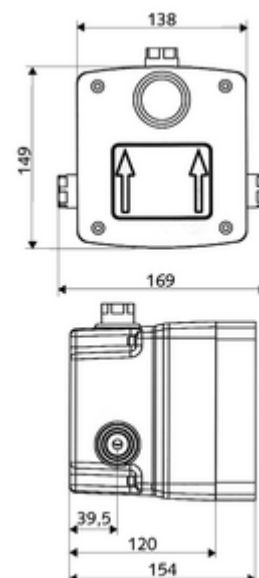

#### Scope of delivery

- Masterbox
  - Roughing-in housing
  - Concealed shower tap with 2 isolating valves
  - Self-closing cartridge SC II with hot water restrictor
  - 2 pre-filters
  - 2 backflow preventers (EN 1717: EB-type)
- Flushing nozzle
- Flush-mounted cap

#### Technical data

- Running time: 5 - 30 s
- Flow at 3 bar: 10 l/min
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Material: Housing Plastic; Waterpath Dezincification-resistant brass, conform to German drinking water regulations
- Dimensions: w 138 mm x h 149 mm x d 120 mm
- Installation depth: 80 - 104 mm
- Connection: 2x G 1/2 IG
- Outlet: G 1/2 IG
- Certificates: P-IX 19960/IB, DIN-DVGW, Belgaqua
- Noise class: I
- Flow class: B

#### Delivery data

- Weight: 1,91 kg/Piece
- Packing unit: 1

#### Necessary associated articles

|  |                          |    |
|--|--------------------------|----|
| Concealed shower LINUS D-SC-M                      | Article no: 01 832 06 99 | or |
| Concealed shower LINUS D-SC-M                      | Article no: 01 832 28 99 | or |
| <u>For building sealing according to DIN 18534</u> |                          |    |
| Expansion sleeve                                   | Article no: 00 919 00 99 |    |

#### Recommended associated articles

|                      |                          |
|----------------------|--------------------------|
| Shower module MONTUS | Article no: 03 091 00 99 |
|----------------------|--------------------------|