

Article number: 00 843 28 99

Shower panel LINUS Inox DP-C-T Mixed water, ThermoProtect thermostat

Made from high-quality stainless steel (1.4404) material with a brushed finish. Integrated SCHELL shower fitting. Triggering via CVD-Touch electronics with automatic closing. Optional battery or mains operation. Suitable for networking with the SCHELL SWS water management system. Configurable via SCHELL Single Control SSC. Pivoting front panel for easy installation and servicing. Suitable for connections from rear or for exposed connections from above. Solenoid valve for thermal disinfection with SWS integrated.

Scope of delivery


- Electronic self-closing exposed shower panel
 - Operating button for thermostat with push sleeve, temperature setting unlockable/lockable at 38 °C
 - CVD-Touch electronics, programmable, IP65 protection against low-pressure water jets
 - ThermoProtect thermostat, conform to EN 1111, anti-scalding protection if cold water supply fails
 - 6 V solenoid valve
 - Solenoid valve 6 V for carrying out thermal disinfection with SWS (in accordance with DVGW worksheet W 551)
 - 2 backflow preventers (EN 1717: EB-type)
 - 2 pre-filters
- Shower head COMFORT Flex, adjustable angle of inclination 12 - 32°, vandal-resistant, with soft jet and anti-limescale knob
- Connection accessories with isolating valve(s)
- Fastening material for wall installation

Technical data

- Setting options via SWS SSC
 - Actuation force (soft/medium/hard)
 - Manual programming (off/on)
 - Max. flow time (1-950 s)
 - Stagnation flush (off/1-1000 s, every 1-250 h after last flush/every 1-250 h)
 - Actuation timeout (off/1-255 s, timeout 1-2000 min)
- Setting options via manual programming
 - Max. flow time (10-360 s in 10 program stages, factory setting 20 s)
 - Stagnation flush (off/20 s, every 24 h)
- Flow: max. 9 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C temporarily
- Material: Actuation Brass; Housing Stainless steel 1.4404; Piping Plastic, conform to German drinking water regulations; Waterpath Brass, conform to German drinking water regulations
- Surface: Actuation Chrome; Housing Brushed stainless steel
- Dimensions: w 240 mm x h 1200 mm x d 80 mm
- Connection: 2x DN 15 G 1/2 AG
- Certificates: Belgaqua

Delivery data

- Weight: 12,81 kg/Piece

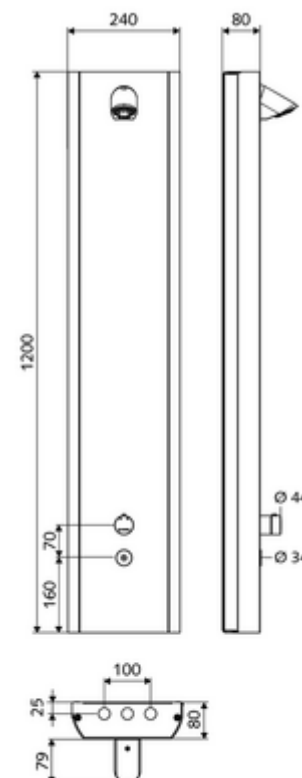

- Packing unit: 1

Necessary associated articles

For operation with SWS

| | |
|--------------------------------|---------------------------------|
| SWS Server | Article no: 00 500 00 99 |
| SWS Bus extender cable BE-K | Article no: 00 501 00 99 and/or |
| SWS Bus extender wireless BE-F | Article no: 00 502 00 99 and/or |
| SWS Bus mains adapter | Article no: 00 505 00 99 |

For operation with BE-F wireless bus extender or without SWS

| | |
|--|-----------------------------------|
| Concealed power supply unit 9 VDC, 100 - 240 VAC, Article no: 01 315 00 99 or 50 - 60 Hz | |
| Top-hat rail transformer 9 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 582 00 99 or 60 Hz |
| Electrical junction box 9 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 583 00 99 or 60 Hz |
| Universal 6 V battery compartment | Article no: 01 557 00 99 or |

Together with mains adapter

| | |
|---------------------------------|-----------------------------|
| Universal connection cable 5 m | Article no: 01 570 00 99 or |
| Universal connection cable 10 m | Article no: 01 571 00 99 or |

Recommended associated articles

| | | |
|--|--------------------------|----|
| Soap tray shower panel LINUS inox | Article no: 00 850 28 99 | |
| Pipe set shower panel connection 500 mm | Article no: 08 481 06 99 | or |
| Pipe set shower panel connection 1000 mm | Article no: 08 482 06 99 | or |
| Connection cover shower panel LINUS inox | Article no: 00 849 28 99 | or |
| Connection cover shower panel LINUS inox | Article no: 00 851 28 99 | or |
| Handle for thermostat EasyGrip | Article no: 29 192 06 99 | |
| Sampling valve COMFORT Flex | Article no: 01 823 00 99 | |
| Low aerosol shower head | Article no: 01 814 06 99 | |

Not together with SWS and SSC Bluetooth module

| | |
|-----------------------|--------------------------|
| CVD-protection filter | Article no: 00 906 00 99 |
|-----------------------|--------------------------|