

Article number: 00 845 28 99

Shower panel LINUS Inox DP-SC-T

Mixed water, ThermoProtect thermostat

Made from high-quality stainless steel (1.4404) material with a brushed finish. Integrated SCHELL shower fitting. Manual actuation with automatic closing. Pivoting front panel for easy installation and servicing. Suitable for connections from rear or for exposed connections from above. Solenoid valve for thermal disinfection integrated.

Scope of delivery

- Self-closing exposed shower panel
 - Operating button for thermostat with push sleeve, temperature setting unlockable/lockable at 38 °C
 - SC self-closing button
 - ThermoProtect thermostat, conform to EN 1111, unlockable/lockable temperature lock at 38 °C, anti-scalding protection if cold water supply fails
 - Self-closing cartridge SC II
 - Solenoid valve 12 V for carrying out thermal disinfection with key switch (without SWS, in accordance with DVGW worksheet W 551)
- 2 backflow preventers (EN 1717: EB-type)
- 2 pre-filters
- Shower head COMFORT Flex, adjustable angle of inclination 12 - 32°, vandal-resistant, with soft jet and anti-limescale knob
- Connection accessories with isolating valve(s)
- Fastening material for wall installation

Technical data


- Running time: 5 - 30 s (20 s)
- Flow: max. 9 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C temporarily
- Material: Actuation Brass; Housing Stainless steel 1.4404; Piping Plastic, conform to German drinking water regulations; Waterpath Brass, conform to German drinking water regulations
- Surface: Actuation Chrome; Housing Brushed stainless steel
- Dimensions: w 240 mm x h 1200 mm x d 80 mm
- Connection: 2x DN 15 G 1/2 AG
- Certificates: Belgaqua

Delivery data

- Weight: 12,80 kg/Piece
- Packing unit: 1

Necessary associated articles

| | |
|---|-----------------------------|
| Thermal disinfection key switch | Article no: 01 538 00 99 |
| Concealed power supply unit 12 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 566 00 99 or |
| Mains adapter VDC, 100-240 VAC, 50-60 Hz | Article no: 01 490 00 99 or |
| Electrical junction box 12 VDC, 100 - 240 VAC, 50 - 60 Hz | Article no: 01 537 00 99 or |

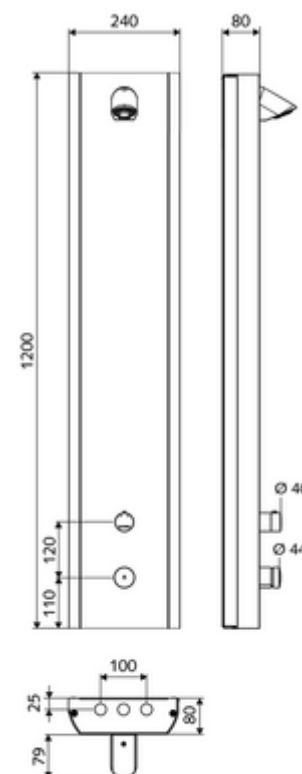

Recommended associated articles

| | | |
|--|--------------------------|----|
| Soap tray shower panel LINUS inox | Article no: 00 850 28 99 | |
| Pipe set shower panel connection 500 mm | Article no: 08 481 06 99 | or |
| Pipe set shower panel connection 1000 mm | Article no: 08 482 06 99 | or |
| Connection cover shower panel LINUS inox | Article no: 00 849 28 99 | or |
| Connection cover shower panel LINUS inox | Article no: 00 851 28 99 | or |
| Handle for thermostat EasyGrip | Article no: 29 192 06 99 | |
| Sampling valve COMFORT Flex | Article no: 01 823 00 99 | |
| Low aerosol shower head | Article no: 01 814 06 99 | |