

Article number: 01 113 06 99

## Infrared exposed urinal flush valves SCHELLTRONIC, DN 15

Battery operation. Configurable via SCHELL Single Control SSC.

### Scope of delivery


- Exposed urinal flush valve
  - Infrared sensor electronics, programmable
  - 6 V solenoid valve with pre-filter
  - Isolating valve
- 4x AAA alkaline battery 1.5 V
- Urinal internal connector
- Push rosette Ø 80 mm
- Flush pipe Ø 18 mm x 193 mm

### Technical data

- Setting options via SSC
  - Sensor range (short/medium/long)
  - Flush time (1-15 s)
  - Stagnation flush (off/5-600 s, every 1-240 h after last flush/every 1-240 h)
  - Pre-flush (off/1 s, lockout time 5-60 min after last flush)
  - Automatic stadium program (off/1 s per user, main flush 20-60s after last use)
  - Odour trap flush (off/1-240 h after last flush)
  - Energy saving mode (off/1-254 h after last flush)
- Setting options via short range reflex
  - Sensor range (short/medium/long)
  - Stagnation flush (off/30 s, every 24 h after last flush/every 24 h)
  - Pre-flush (off/1 s)
  - Automatic stadium program (off/1 s per user)
  - Rap flush (off/on)
  - Flush time (1-15 s)
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Flush flow: 0.3 l/s, conform to DIN EN 12541
- Material: Parts in contact with water Brass, conform to German drinking water regulations
- Surface: Chrome
- Connection: DN 15 G 1/2 AG
- Outlet: Internal connector Ø 43 mm (flush pipe Ø 18 mm)
- Certificates: PA-IX 8952/II
- Noise class: II, at 100% flow

### Delivery data

- Weight: 1,24 kg/Piece
- Packing unit: 1

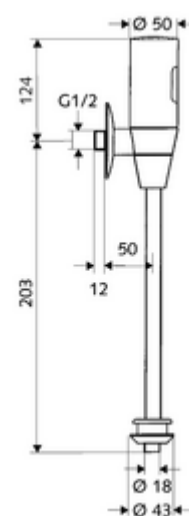

### Recommended associated articles

Flush pipe Ø 18 mm cranked	Article no: 50 223 06 99	or
Urinal external connector	Article no: 27 820 06 99	
Urinal module MONTUS	Article no: 03 090 00 99	

SSC Bluetooth® module  
SSC USB adapter

Article no: 00 916 00 99  
Article no: 01 586 00 99

or  
or