

Article number: 03 090 00 99

## Urinal module MONTUS

Urinal module, height 115 cm. For stud wall or pre-wall mounting or exposed installation. Self-supporting, powder-coated steel profiled frame with height-adjustable feet and cross bars. Prepared for the connection of exposed urinal flush valves.

### Scope of delivery


- Urinal module
  - Cross bar for urinal attachment 40-375 mm, height-adjustable
  - Cross bar with noise-insulated fitting connection, with construction plug, height-adjustable
  - Cross bar with drain elbow and construction plug, height-adjustable
  - Galvanised, height-adjustable mounting feet 0 - 20 cm with slip resistance
- Fastening material for installation feet
- Fastening material for urinal installation (fastening bolts M 8 x 100 mm, protection hose, plastic collar bushings, nuts, flat washers, cover caps)

### Technical data

- Material: Frame Steel
- Surface: Frame Powder coat finish
- Dimensions: w 50 cm x h 115 cm
- Waste water connection: Ø 50 mm
- Water connection: DN 15 G 1/2 AG (bottom)
- Waste water outlet: Ø 50 mm
- Water outlet: DN 15 G 1/2 IG

### Delivery data

- Weight: 9,74 kg/Piece
- Packing unit: 1

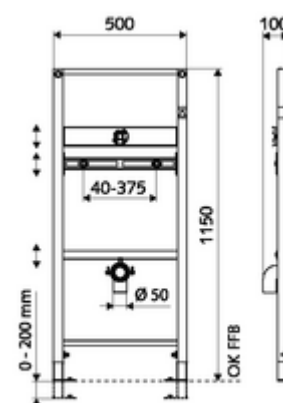

### Necessary associated articles

#### For exposed installation

MONTUS wall bracket set (120 - 170 mm)

Article no: 03 071 00 99

MONTUS wall bracket set (150 - 210 mm)

Article no: 03 077 00 99

#### Exposed urinal flush valve

Infrared exposed urinal flush valves SCHELLTRONIC, DN 15 Article no: 01 113 06 99

Infrared exposed urinal flush valve SCHELLTRONIC, DN 15 Article no: 01 115 06 99

Exposed urinal flush valve SCHELLOMAT Basic, DN 15 Article no: 02 476 06 99

Exposed urinal flush valve SCHELLOMAT Basic SV, DN 15 Article no: 02 477 06 99