


Article number: 01 946 00 99

Concealed Masterbox WBW-E-M

Mixed water

For LINUS W-E-M concealed wash basin taps. Electronic actuation. With sealed housing bushings and internal isolating valve.

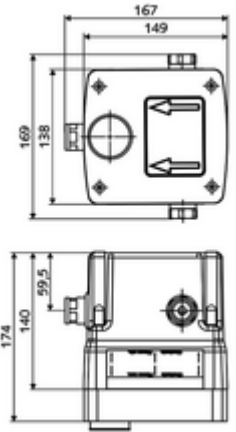

Scope of delivery

- Masterbox
 - Roughing-in housing
 - Concealed wash basin tap with 2 isolating valves
 - 6 V solenoid valve
 - Mixing cartridge
 - 2 pre-filters
 - 2 backflow preventers (EN 1717: EB-type)
 - Mount for wall outlet
- Flushing nozzle
- Flush-mounted cap

Technical data

- Flow at 3 bar: 15 l/min
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Material: Housing Plastic; Waterpath Dezincification-resistant brass, conform to German drinking water regulations
- Dimensions: w 149 mm x h 138 mm x d 140 mm
- Installation depth: 100 - 124 mm
- Connection: 2x G 1/2 IG
- Certificates: Belgaqua

Delivery data

- Weight: 2,30 kg/Piece
- Packing unit: 1

Necessary associated articles

Concealed wash basin tap LINUS W-E-M	Article no: 01 929 06 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 930 06 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 929 28 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 930 28 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 932 06 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 933 06 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 932 28 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 933 28 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 935 06 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 936 06 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 935 28 99	or
Concealed wash basin tap LINUS W-E-M	Article no: 01 936 28 99	or
<u>For building sealing according to DIN 18534</u>		
Expansion sleeve	Article no: 00 919 00 99	

Recommended associated articles

Wash basin module MONTUS

Article no: 03 088 00 99