

Article number: 02 130 06 99

Self-closing wash basin tap PETIT SC HD-K - high-pressure cold water/pre-mixed water



Manual actuation with automatic closing. Easy flow time adjustment.

Scope of delivery


- Self-closing single-hole tap
 - Self-closing cartridge SC II
 - Flow regulator
- Fastening material for wash basin installation

Technical data

- Running time: 2 - 15 s (7 s)
- Flow: max. 5 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Material: Housing Dezincification-resistant brass, conform to German drinking water regulations
- Surface: Chrome
- Connection: DN 15 G 1/2 AG
- Certificates: P-IX 19958/IO, dr, Watermark, WELS
- Noise class: I
- Flow class: O

Delivery data

- Weight: 0,98 kg/Piece
- Packing unit: 1

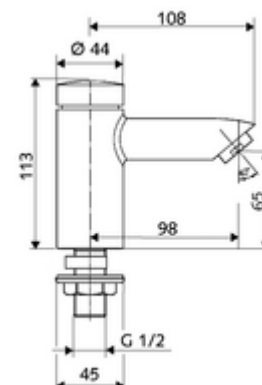

Necessary associated articles

Tap hole rosette PETIT Article no: 76 063 06 99

Recommended associated articles

Flow regulator max. 5.7 l/min pressure-independent, theft-proof	Article no: 02 121 06 99
Flexible Clean-Flex S hose	Article no: 10 318 06 99 or
Flexible Clean-Flex S hose	Article no: 10 319 06 99 or
Angle valve with regulating function COMFORT with filter	Article no: 05 430 06 99 or
Angle valve with regulating function COMFORT with filter	Article no: 05 428 06 99 or
Wash basin outlet valve OPEN	Article no: 02 002 06 99 or
Wash basin outlet valve PUSH OPEN	Article no: 02 000 06 99 or